

MOD®

The original and best spreader beam



0.4 to 36m span ↔

6t to 2000t ⚖️

Modular 📏 + 📏

Compatible with TRUNNION, CMOD® and TriMOD



Modular, lightweight and portable. Mix and match components to re-use at different spans

Next day delivery worldwide*

*Subject to Availability


4 Tel. +44 (0)1202 621511 Email sales@modulift.com

MOD®

What is included?

Your selected struts, two end units, two drop links, and nuts & bolts are supplied as standard. Slings and shackles can be supplied at an additional cost.

To select your required beam, see load v span charts overleaf. Select the number and length of struts for your required span below.

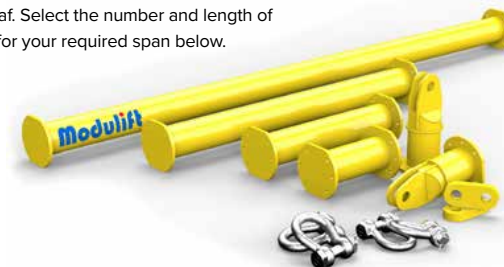

Select the number and length of struts for your required span. To select your required beam size, see load v span charts overleaf

Beam size	Available strut lengths (metres)*													
	0.1	0.2	0.25	0.3	0.5	0.6	0.75	1.0	1.5	2.0	3.0	4.0	5.0	6.0
MOD® 6	✓	✓		✓		✓		✓						
MOD® 12			✓		✓		✓	✓	✓					
MOD® 24					✓			✓		✓				
MOD® 34					✓			✓		✓				
MOD® 50					✓			✓		✓		✓		
MOD® 70/70H					✓			✓		✓		✓		
MOD® 110/110H/110SH					✓			✓		✓		✓		
MOD® 250-250 / 250-300 / 250-400					✓			✓		✓	✓			✓
MOD® 400-400 / 400-500 / 400-600					✓			✓		✓	✓			✓
MOD® 600-600 / 600-800 / 600-1000					✓			✓		✓	✓	✓	✓	✓
MOD® 800-1200 / 800-1500					✓			✓		✓	✓	✓	✓	✓
MOD® 1100-2000					✓			✓		✓	✓	✓	✓	✓

*Custom length struts can be manufactured to suit the required span

Optional extras



Stepdown end unit



Hybrid cone adaptor



Clevis drop-link & delta plate



Trunnion drop link



Proof load testing



Alternative paint colour



Stillages


www.modulift.com 5

Which size MOD[®] spreader beam?

Select the required load and span

MOD[®]

Load v span chart MOD[®] 6 to 110H

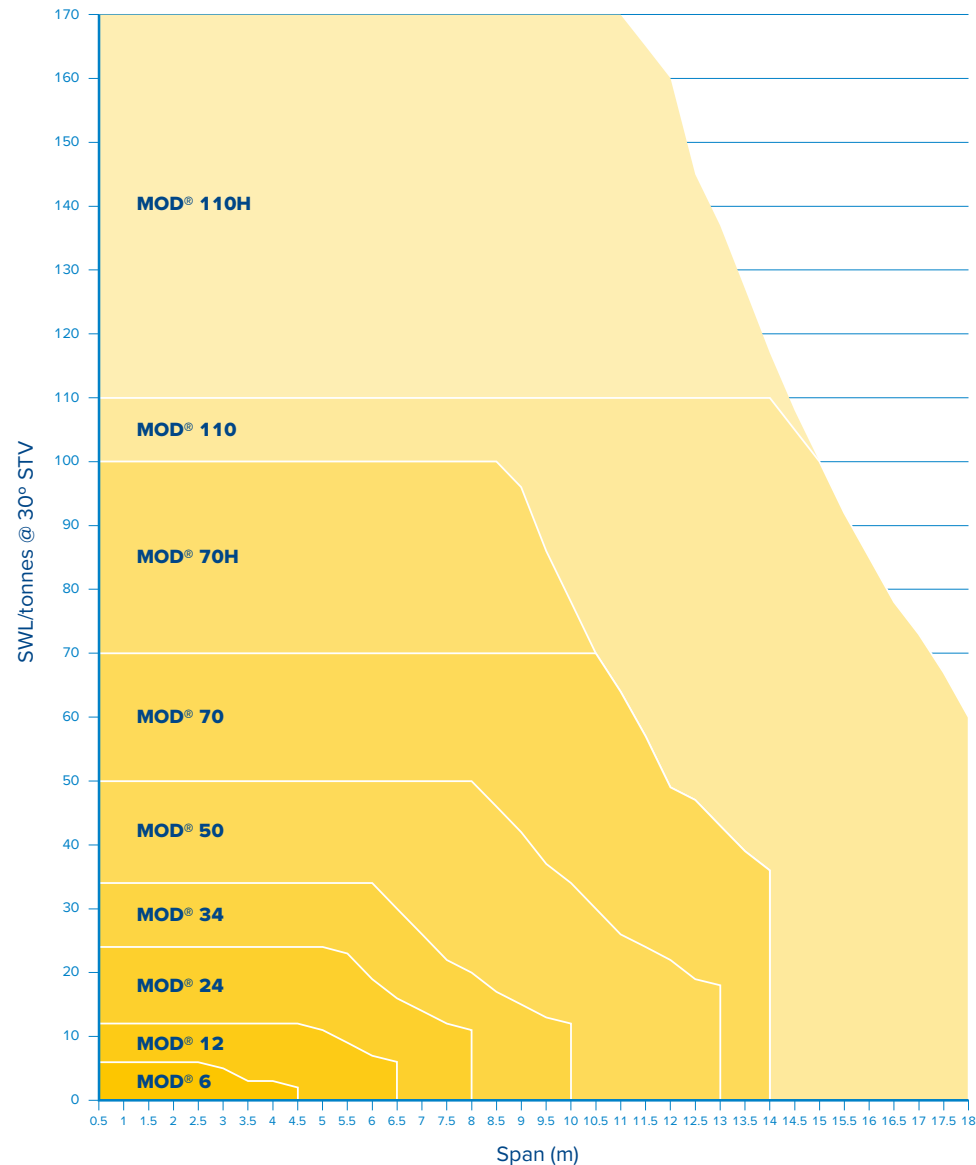

Load v span chart MOD[®] 110SH to 1100/2000

