



Green Pin® Snatch Block HK



Snatch block type 601H with hook attached

- **Material:** carbon steel, fitted with conical roller bearings
- **Safety factor:** MBL equals 4 x WLL
- **Finish:** painted
- **Certification:** 2.1 2.2 MTC^b CE IIA
- **Article code:** scan QR code to see article codes
- **Note:** Working Load Limit is on the headfitting

Scan for
additional
product
details



P-6952

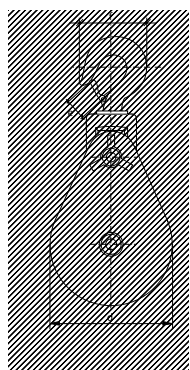

working load limit	diameter wire rope	diameter outside sheave	length	thickness	width outside	opening hook	width outside	weight each
t	mm	a mm	b mm	c mm	d mm	e mm	f mm	kg
2	7 - 9	75	290	87	82	30	108	3.68
4	10 - 12	115	358	89	120	43	132	6
4	12 - 14	150	412	89	160	43	132	8.50
8	20 - 22	150	502	119	160	45	165	11.8
12	20 - 22	150	616	119	160	71	226	20.5
15	24 - 26	150	626	138	160	71	226	23.4
4	10 - 12	200	473	91	210	43	132	8
8	20 - 22	200	551	119	210	45	165	20.4
12	20 - 22	200	641	129	210	71	226	30
15	24 - 26	200	663	142	210	71	226	29.5
8	20 - 22	250	606	103	260	45	165	25.4
12	20 - 22	250	728	125	260	71	226	35.5
15	24 - 26	250	745	166	260	71	226	41
8	20 - 22	300	671	119	310	45	165	32
12	20 - 22	300	810	166	310	71	226	50
15	24 - 26	300	810	166	310	71	226	52
8	20 - 22	350	716	119	360	45	165	38
12	20 - 22	350	835	166	360	71	226	59
15	24 - 26	350	837	166	360	71	226	58.5
8	20 - 22	400	780	119	415	45	165	48
12	20 - 22	400	888	166	415	71	226	36
15	24 - 26	400	890	166	415	71	226	68.5
8	20 - 22	450	841	119	465	45	165	58
12	20 - 22	450	942	166	465	71	226	42
15	24 - 26	450	942	166	465	71	226	82

CAD