


MODELO "D" ALMA DE ACERO

DIÁMETRO DEL CABLE		ESQUEMAS REPRESENTATIVOS DEL ESTROBO			TIPOS DE ARGOLLA		TIPOS DE ROZADERA	
PULG	MM	60°	45°	30°	PERA	OVAL	P/ EXTREMOS	P/ ARGOLLA
		CAPACIDAD DE CARGA EN TONELADAS MÉTRICAS ÁNGULOS TOMADOS SOBRE LA HORIZONTAL			DIÁMETROS		DIÁMETROS	
1/4"	6.35	1	0.83	0.59	1/2"	MS13	Std. 5/16"	Std. 3/8"
5/16"	7.94	1.54	1.27	0.91	5/8"	MS16 (1/2")	Std. 3/8"	Std. 1/2"
3/8"	9.53	2.27	1.81	1.27	3/4"	MS18 (5/8")	Std. 1/2"	Std. 1/2"
7/16"	11.11	3.08	2.45	1.72	7/8"	MS18 (5/8")	Std. 1/2"	Std. 5/8"
1/2"	12.70	3.99	3.27	2.27	1"	MS20 (3/4")	Std. 5/8"	Std. 3/4"
9/16"	14.30	4.99	4.08	2.90	1 1/4"	MS22 0 MS25 (7/8")	Std. 3/4"	Std. 3/4"
5/8"	15.90	6.17	4.99	3.54	1 1/4"	MS25 (7/8")	Std. 3/4"	Std. 3/4"
3/4"	19.05	8.80	7.17	5.08	1 3/8"	MS30 0 MS28 (1")	Std. 7/8"	Std. 7/8"
7/8"	22.23	11.79	9.98	6.89	1 3/8"	MS36 (1 1/4")	Std. 1"	Ref. 1"
1"	25.40	15.42	12.7	8.89	1 3/4"	MS38 (1 1/2")	Ref. 1"	Ref. 1"
1 1/8"	28.60	19.05	15.42	10.89	1 3/4"	MS44 0 MS45 (1 3/4")	Ref. 1 1/8"	Ref. 1 1/4"
1 1/4"	31.75	23.59	19.05	13.61	2"	MS45 (1 3/4")	Ref. 1 1/4"	Ref. 1 3/8"
1 3/8"	34.90	28.12	22.68	16.33	2"	MS50 (2")	Ref. 1 3/8"	Ref. 1 3/8"
1 1/2"	38.10	33.57	27.22	19.05	2 1/4"	MS50 (2")	Ref. 1 1/2"	Ref. 1 5/8"
1 3/4"	44.45	44.45	36.29	25.40	2 1/2"	MS55	Ref. 1 3/4"	Ref. 1 7/8"
2"	50.80	57.15	47.17	33.57		MS70	Ref. 2"	Ref. 2"

* FACTOR DE DISEÑO DE 5:1

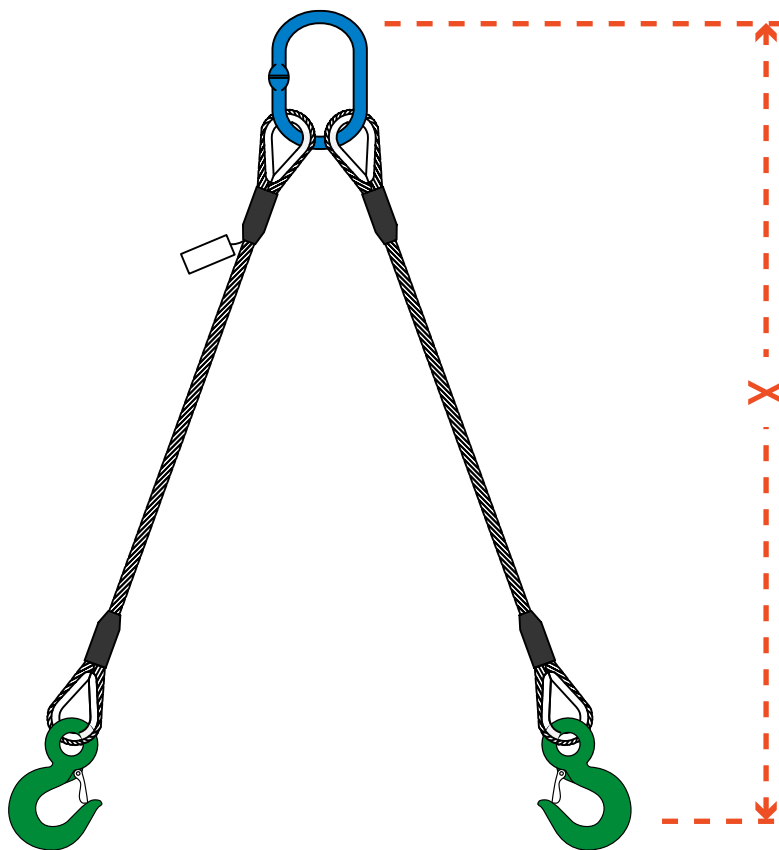

*X = Longitud
Punto de Apoyo a Punto de Apoyo
(PA-PA)