
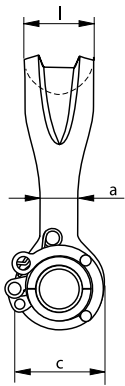


P-6065

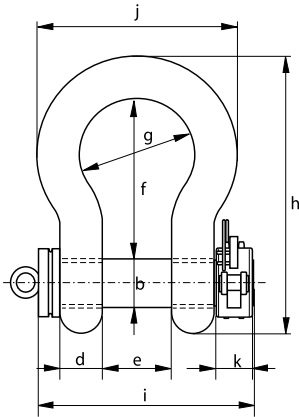

Green Pin® Locking Clamp ROV Sling Shackle

Release ROV Sling shackle (grade 8) with locking clamp

- **Material:** bow and pin alloy steel, grade 8, quenched and tempered
- **Safety Factor:** MBL equals 5 x WLL
- **Finish:** shackle bow painted white, pin painted green
- **Temperature Range:** -40 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC^b CE IIA **Optional*:** LROS MPI^b US^b
- **Article code:** scan QR code to see article codes



working load limit	diameter body	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	width locking clamp	bearing surface	weight pin	weight each
t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	l mm	kg	kg
12.5	28	28	61	25	44	121	82	197	143	146	31	54	1.2	4.27
18	35	35	69	30	54	148	102	239	184	180	31	64	1.9	6.85
30	40	42	90	35	69	165	126	279	210	200	40	79	3.5	12.5
40	55	51	109	45	84	199	140	331	256	235	40	97	5.4	20.3
55	60	57	115	55	90	240	160	389	289	270	40	100	7	30.4
75	68	70	125	54	110	290	185	473	317	317	40	120	11.6	45
125	85	80	154	85	137	366	220	583	413	390	40	150	18.1	92
150	94	95	179	89	147	391	253	645	445	434	55	170	29.1	140
200	110	105	199	100	158	481	280	759	480	482	55	205	37	205
250	126	120	227	110	179	542	300	859	523	530	55	240	49.4	264
300	135	134	245	122	195	601	350	947	563	620	55	265	66.5	360

CAD RFID INFO

* With additional charges